


Bring your own Appliance

Linksys, Cisco SPA Series Phone.


At the phone press the button for setting as show in the picture



Press the button "9" and the screen will show the IP address


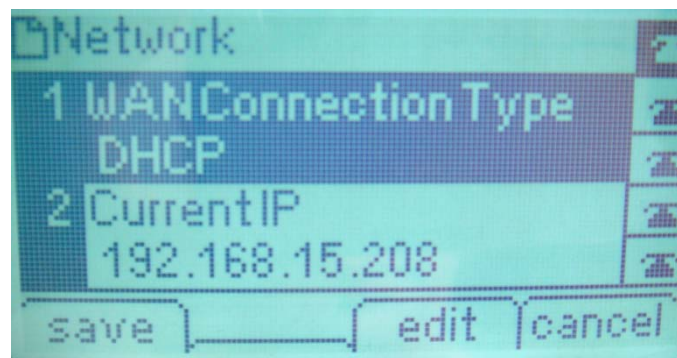


Open Internet explorer or any other internet software and type IP address

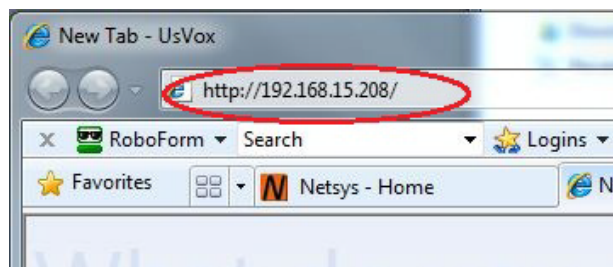





Press Admin Login

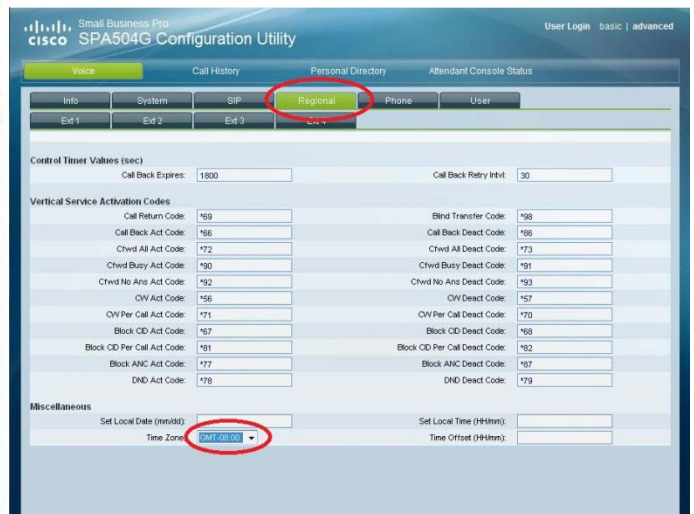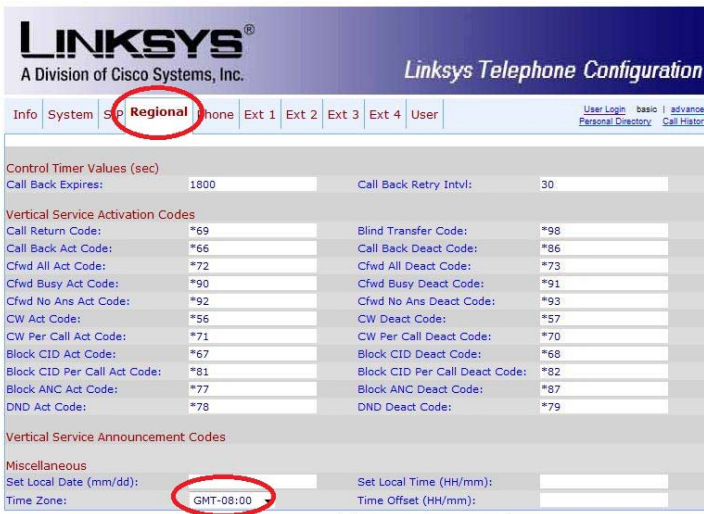

Go to the Regional Tap, and Change the time Zone for your Phone.

Set your time and date.

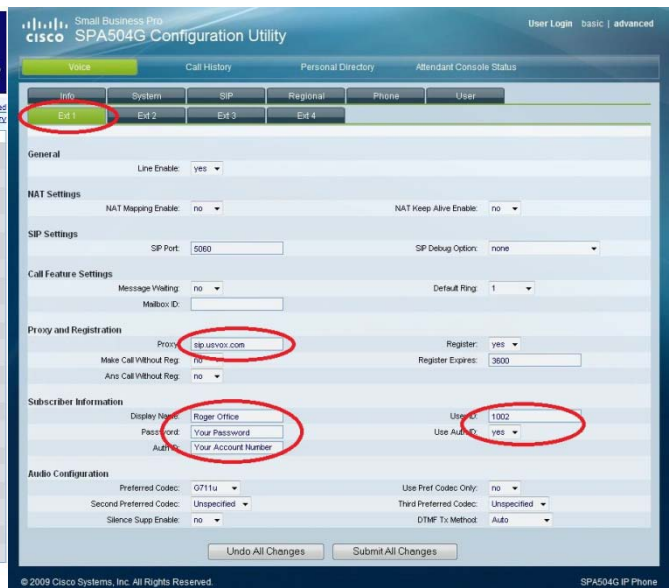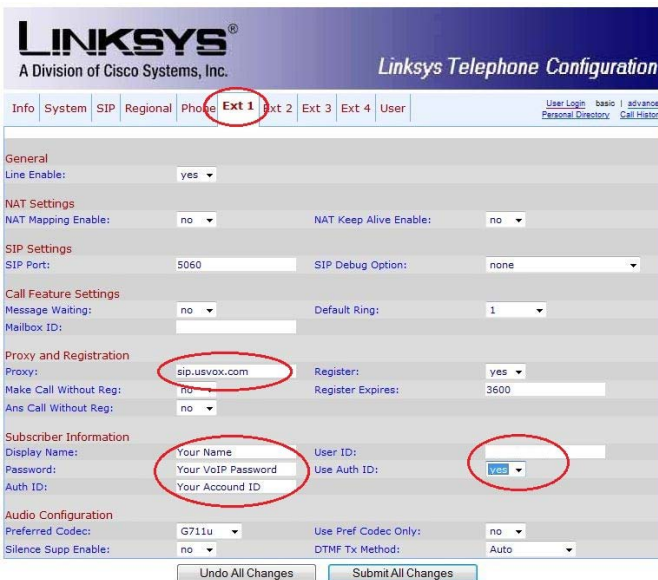

Go to EXT1 type in the proxy: **sip.usvox.com**

Display name: **You Name**

User ID: **Your Account id** or the **Abbreviate number** station (Ask you phone system Admin)

Password: **The Password provided by UsVox**

User Auth ID: **Yes**

Auth ID: **Account Number**

Small Business Pro
cisco SPA504G Configuration Utility

User Login basic | advanced

Voice Call History Personal Directory Attendant Console Status

Info System SIP Regional **Phone** User

Ext 1 Ext 2 Ext 3 Ext 4

General

Station Name: Voice Mail Number:

Text Logo:

BMP Picture Download URL:

Select Logo: Default Select Background Picture: None

Screen Saver Enable: no Screen Saver Wait: 300

Screen Saver Icon: Background Picture

Line Key 1

Extension: Short Name:

Line Key 2

Extension: Short Name:

Line Key 3

Extension: Short Name:

Line Key 4

Extension: Short Name:

Line Key 12

SCA Line ID Mapping: Vertical First ACD Ext: 1

Ring Tone

Ring1:

Ring2:

Ring3:

Ring4:

Undo All Changes Submit All Changes

Go to Phone Tap: Type *98 on Voice Mail Number.

Change the Line key to the number of the Extension you program before.

Short Name: \$USER or any other name for the phone line.

Press Submit All Changes and wait until the phone reboot.